

输出功率: 约5.0~80.0W  
直流无刷电机


典型应用: 医疗器械  
精密仪器  
家用电器  
商业设备

OUTPUT: APPROX 5.0~80.0W  
Brushless DC Motor

Typical Applications: Medical Instruments  
Precision Instrument  
Household Appliances  
Business Equipment

## 1. OUTLINE DRAWING:

UNIT:MM

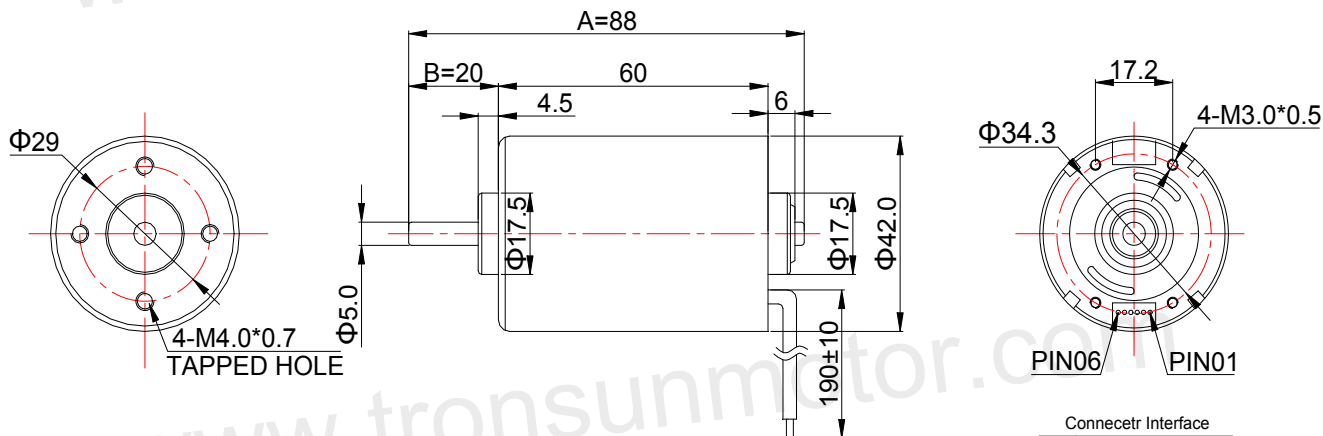

Customizable Parameters:  
1. Length A and B  
2. Electric Performance

WEIGHT: 295g(Approx)

View:



Connectr Interface

NO.	PIN ARRANGEMENT
1	VCC(Red Wire)
2	FG(Green Wire)
3	CW/CCW(Yellow Wire)
4	GND(Black Wire)
5	PWM(Blue Wire)
6	BRAKE(White Wire)

## 2. MOTOR PERFORMANCE :

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STALL			
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	TORQUE	CURRENT		
		V	rpm	A	rpm	A	g.cm	mN.m	W	g.cm	mN.m	A
BL4260I-243300	8.0~26.0	24.0	3300	0.26	2660	1.08	670	65.75	18.28	3500	343.47	4.56
BL4260I-184100	8.0~20.0	18.0	4100	0.40	3340	1.76	650	63.79	22.27	3530	346.42	7.80

